







## DirectTex® AKUSTICO®

Fields of application

**.01 .02 .03 .04 .05 .06 .07 .08 .10 .12**


### Specifications

	506251 113
	100 % polyester
	ca. 155/ 310 cm ca. 61/ 122 inch
	B-s1, d0    DIN EN 13501-1 M1            NF P 92 503
	ca. 270 g/m <sup>2</sup> ca. 8.0 oz/yd <sup>2</sup>
	rolls 30 m 33 yd
	100Pa: 195 l/ (m <sup>2</sup> s) 200Pa: 342 l/ (m <sup>2</sup> s) DIN EN ISO 9237
	warp: 2668 N (97 N) weft: 1589 N (123 N) DIN EN ISO 1421 (13937-2)
	warp: 48.5 % weft: 41.7 % DIN EN ISO 1421
	light: 5    medium: 5    dark: 6 DIN EN ISO 105-B02
	warp: 0.4 % weft: 1.3 % DIN EN 14704-1
	heat, ultrasonic cut

### Printing methods




### Individual applications

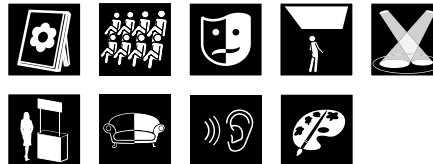

### Certifications

Acoustic absorption value  $\alpha_w$ /class\*: 0.90/ A

Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 40 mm ISOVER SSP 2 and 10 mm airspace.

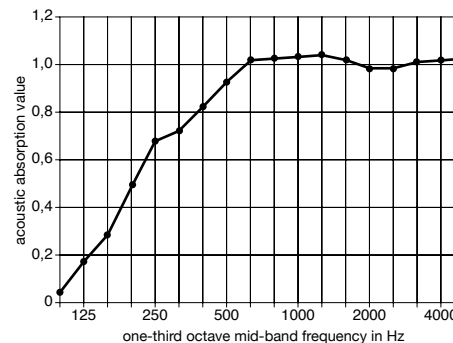

## DirectTex® AKUSTICO®

Fields of application

.01 .02 .03 .04 .05 .06 .07 .08 .10 .12



Ref.-Nr.: 506251 113 | Preview print sample