

Samples for .04

Stage, Show & Event



More samples

available for the following
fields of application

.01 Walls, Ceilings & Panels

.02 Large Format Printing

.03 Contract Building

.04 Stage, Show & Event

.05 Shop Design

.06 Decoration

.07 Printing Solutions

.08 Technical Applications

.09 Foils

.10 Textile Finishing

.11 Displays- Applications

.12 Interior

Key

Specifications

	article number/ reference
	material
	width
	thickness
	flame protection
	weight
	presentation (rolls/ bales/ stack)
	light transmission factor
	air permeability
	solar characteristics
	trapezoid tear resistance maximum tensile strength maximum tensile elongation
	light fastness
	luminous reflectance
	printing methods
	tailor-made/ cutting methods
	determination of bacteriostatic activity
	other product properties/ specifications

Key

Certifications



surface material with low flame-spread characteristics for sea going vessels



Sanitized AG certified for antimicrobial activity



acoustic absorption value/ class



UV Standard 801 (Hohenstein)



Conformité Européenne conformity marking within the European Economic Area



fabric free of formaldehyde and other volatile organic compounds (VOC)



Environmental Product Declaration

Individual applications



exhibition



digital printing/ art reproduction



display system



textile construction



backlit



blackout fabric



roller blind



inflatable systems

Key

Individual applications



table cloth



cover



stretch fabric



curtain



stage/ show/ event



upholstery fabric



chroma key fabric
(e.g. blue screen)



flag system



theatre



sun protection



acoustic fabric



stretch ceiling



outdoor fabric



projection screen



surface design/ lamination




visual merchandising


Square Mesh Cotton

Fields of application

.02 .04 .05 .06 .07




303



900



311



347

Fabrics up to 520 cm (205 inch) can be dyed any colour.

Square Mesh Cotton

Specifications

	503
	100 % cotton VdS-certified, sprinkler-compatible, crease-resistant
	ca. 320/ 520 cm ca. 126/ 205 inch See below for more details.
	B-s1, d0 DIN EN 13501-1
	ca. 90 g/m ² ca. 2.7 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: > 3000 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 28.2 N weft: 38.5 N DIN EN ISO 9073-4
	all colours: 6 DIN EN ISO 105-B02
	cold cut

colour	available widths (in cm)	
	320	520
303	•	•
900	•	•
311		•
347	•	•

Individual applications




card 1/1, effective: 02/2018

Square Mesh

Trevira CS

Fields of application


.02 .04 .05 .06 .07




906



305



156



347

Square Mesh Trevira CS

Specifications

	502
	100 % Trevira CS crease-resistant
	ca. 175/ 320/ 520 cm ca. 69/ 126/ 205 inch See below for more details.
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1
	ca. 75 g/m ² ca. 2.2 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: > 3000 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 77.3 N weft: 106.1 N DIN EN ISO 9073-4
	all colours: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)		
	175	320	520
906	•*	•	•
305			•
156			•
347		•	•

* presented in rolls

Individual applications



card 1/1, effective: 02/2018

Sheer Muslin Cotton

Fields of application

.04 .05 .06



303



900



313



347



184

Fabrics up to 520 cm (205 inch) can be dyed any colour.

Sheer Muslin Cotton

Specifications

	800
	100 % cotton
	ca. 170/ 320/ 420/ 520/ 620 cm ca. 67/ 126/ 165/ 205/ 244 inch See below for more details.
	B1 DIN 4102 (620 cm width only without flame retardant finish)
	ca. 75 g/m ² ca. 2.2 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: 2400 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 7.8 N weft: 10.4 N DIN EN ISO 9073-4
	light: 5 medium: 4 dark: 5-6 DIN EN ISO 105-B02
	cold cut

colour	available widths (in cm)				
	170	320	420	520	620
303	•	•	•	•	•*
900	•	•	•	•	•*
313		•			
184	•	•			
347	•	•	•	•	

* only without flame retardant finish

Individual applications



card 1/1, effective: 02/2018

Sheer Muslin Polyester FR

Fields of application

.04 .05 .06



303



900



156



347

Sheer Muslin

Polyester FR

Specifications

	802
	100 % polyester FR OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 320/ 420/ 520/ 620 cm ca. 126/ 165/ 205/ 244 inch See below for more details.
	B-s1, d0 DIN EN 13501-1
	ca. 75 g/m ² ca. 2.2 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: > 3000 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 22.3 N weft: 27.7 N DIN EN ISO 9073-4
	light: 6 medium: 6 dark: 5-6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)			
	320	420	520	620
303	•	•	•	•
900	•		•	
156	•*			
347	•*		•	

• presented in bales •* presented in rolls

Individual applications



card 1/1, effective: 02/2018

Sheer Muslin Trevira CS

Fields of application

.04 .05 .06



303



900



176



347

Sheer Muslin

Trevira CS

Specifications

	801
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 155/ 320/ 420/ 520/ 620 cm ca. 61/ 126/ 165/ 205/ 244 inch See below for more details.
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 75 g/m ² ca. 2.2 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: > 3000 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 98.8 N weft: 48.9 N DIN EN ISO 9073-4
	light: 4-5 medium: 4 dark: 5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)				
	155	320	420	520	620
303	•	•	•	•	•
900	•	•	•	•	•
176				•	
347			•	•	•

Individual applications




card 1/1, effective: 02/2018

Standard Muslin Cotton

Fields of application


.02 .04 .05 .06



303



910



347



900



555




184



644



162



717



462

Fabrics up to 520 cm (205 inch) can be dyed any colour.

Standard Muslin Cotton

Specifications

	810
	100 % cotton
	ca. 130/ 150/ 170/ 240/ 310/ 420/ 520 cm ca. 51/ 59/ 67/ 94/ 122/ 165/ 205 inch See below for more details.
	B1 DIN 4102
	ca. 145 g/m ² ca. 4.3 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: 952 l/(m ² s) 200 Pa: 1286 l/(m ² s) DIN EN ISO 9237
	warp: 7.7 N weft: 7.7 N DIN EN ISO 9073-4
	light: 4-5 medium: 3 dark: 5 DIN EN ISO 105-B02
	cold cut

colour	available widths (in cm)						
	130	150	170	240	310	420	520
303	•*	•*	•	•	•	•	•
910				•			
347	•*	•*	•	•	•	•	•
900	•*	•*	•	•	•	•	•
555		•*					
184					•		
644		•*					
162		•*					
717		•*					
462		•*					

• presented in bales •* presented in rolls

Individual applications



card 1/1, effective: 02/2018

Standard Muslin Polyester FR

Fields of application

.02 .04 .05 .06



303



900



305



347



650



156

Standard Muslin

Polyester FR

Specifications

	812
	100 % polyester FR OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 320/ 420/ 510/ 620 cm ca. 126/ 165/ 201/ 244 inch See below for more details.
	B-s1, d0 DIN EN 13501-1
	ca. 145 g/m ² ca. 4.3 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: 714 l/(m ² s) 200 Pa: 1175 l/(m ² s) DIN EN ISO 9237
	warp: 22.8 N weft: 22.3 N DIN EN ISO 9073-4
	light: 5-6 medium: 6 dark: 5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)			
	320	420	510	620
303	•	•	•	•
900	•	•	•	
305	•*			
347	•*	•	•	
650	•*	•		
156	•*	•	•	

• presented in bales •* presented in rolls

Individual applications




card 1/1, effective: 02/2018

Standard Muslin

Trevira CS

Fields of application

.02 .04 .05 .06



303



900



347

Standard Muslin

Trevira CS

Specifications

	811
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 320/ 420/ 520/ 620 cm ca. 126/ 165/ 205/ 244 inch See below for more details.
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 145 g/m ² ca. 4.3 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: 942 l/(m ² s) 200 Pa: 1509 l/(m ² s) DIN EN ISO 9237
	warp: 42.3 N weft: 34.7 N DIN EN ISO 9073-4
	light: 6 medium: > 6 dark: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)			
	320	420	520	620
303	•	•	•	
900	•	•	•	•
347				•

Individual applications




card 1/1, effective: 02/2018

Muslin 4x16 Cotton

Fields of application

.04 .05 .06



303



900



305



347



464



478



650



184



146



156

Fabrics up to 520 cm (205 inch) can be dyed any colour.

Muslin 4x16

Cotton

Specifications

	820
	100 % cotton
	ca. 160/ 220/ 310/ 420/ 520/ 620 cm ca. 63/ 87/ 122/ 165/ 205/ 244 inch See below for more details.
	B1 DIN 4102
	ca. 200 g/m ² ca. 5.9 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: 197 l/(m ² s) 200 Pa: 294 l/(m ² s) DIN EN ISO 9237
	warp: 9.7 N weft: 12.0 N DIN EN ISO 9073-4
	light: 4 medium: 3-4 dark: 5 DIN EN ISO 105-B02
	cold cut

colour	available widths (in cm)					
	160	220	310	420	520	620
303	•	•	•	•	•	•*
900	•	•	•	•	•	•*
305				•	•	
347		•	•	•	•	
464					•	
478			•			
650				•	•	
184	•		•			
146					•	
156				•	•	

* only without flame retardant finish

Individual applications



card 1/1, effective: 02/2018

Muslin 4x16

Polyester FR

Fields of application


.04 .05 .06



303



900



650



460



146



184



156



347

Muslin 4x16

Polyester FR

Specifications

	822
	100 % polyester FR OEKO-TEX® Standard 100 (Hohenstein)
	ca. 320/ 420/ 520/ 620 cm ca. 126/ 165/ 205/ 244 inch See below for more details.
	B-s1, d0 DIN EN 13501-1
	ca. 200 g/m ² ca. 5.9 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: 239 l/(m ² s) 200 Pa: 417 l/(m ² s) DIN EN ISO 9237
	warp: 26.4 N weft: 28.8 N DIN EN ISO 9073-4
	light: 5-6 medium: 5-6 dark: 5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)			
	320	420	520	620
303	•	•	•	•
900	•	•	•	•
650	•*		•	
460	•*			
146	•*			
184	•*			
156	•*		•	
347	•*	•	•	•

• presented in bales •* presented in rolls

Individual applications



card 1/1, effective: 02/2018

Muslin 4x16

Trevira CS

Fields of application

.04 .05 .06



303



900



305



347



650



156

Muslin 4x16

Trevira CS

Specifications

	821
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 155/ 320/ 420/ 520/ 620 cm ca. 61/ 126/ 165/ 205/ 244 inch See below for more details.
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 200 g/m ² ca. 5.9 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: 538 l/(m ² s) 200 Pa: 877 l/(m ² s) DIN EN ISO 9237
	warp: 27.7 N weft: 23.7 N DIN EN ISO 9073-4
	light: 5 medium: 6 dark: 5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)				
	155	320	420	520	620
303	•	•	•	•	•
900	•	•	•	•	•
305				•	•
347		•*		•	•
650				•	•
156				•	•

• presented in bales •* presented in rolls

Individual applications



card 1/1, effective: 02/2018

Muslin Canvas Cotton

Fields of application

.04 .05 .06



303



900



184



347

Fabrics up to 520 cm (205 inch) can be dyed any colour.

Muslin Canvas Cotton

Specifications

	830
	100 % cotton
	ca. 220/ 320/ 420/ 520 cm ca. 87/ 126/ 165/ 205 inch
	B1 DIN 4102
	ca. 300 g/m ² ca. 8.8 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: 39.3 l/(m ² s) 200 Pa: 75.3 l/(m ² s) DIN EN ISO 9237
	warp: 36.4 N weft: 45.2 N DIN EN ISO 9073-4
	light: 4-5 medium: 5 dark: 5-6 DIN EN ISO 105-B02
	cold cut

colour	available widths (in cm)			
	220	320	420	520
303	•	•	•	•
900	•	•	•	•
184		•		
347		•	•	•

Individual applications




card 1/1, effective: 02/2018

Muslin Canvas Polyester FR

Fields of application

.04 .05 .06



303



900



347

Muslin Canvas

Polyester FR

Specifications

	832
	100 % polyester FR OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 320/ 420/ 520/ 620 cm ca. 126/ 165/ 205/ 244 inch
	B-s1, d0 DIN EN 13501-1
	ca. 300 g/m ² ca. 8.8 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: 255 l/(m ² s) 200 Pa: 442 l/(m ² s) DIN EN ISO 9237
	warp: 161.8 N weft: 282.1 N DIN EN ISO 9073-4
	light: 5-6 medium: 5-6 dark: 5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)			
	320	420	520	620
303	•	•	•	•
900	•	•	•	•
347	•*	•	•	

• presented in bales •* presented in rolls

Individual applications




card 1/1, effective: 02/2018

Muslin Canvas

Trevira CS

Fields of application

.04 .05 .06



303



900



184



347

Muslin Canvas

Trevira CS

Specifications

	831
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 320/ 420/ 520/ 620 cm ca. 126/ 165/ 205/ 244 inch
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 300 g/m ² ca. 8.8 oz/yd ²
	bales/ rolls (See below for more details.) 30/ 60 m 33/ 67 yd
	100 Pa: 262 l/(m ² s) 200 Pa: 402 l/(m ² s) DIN EN ISO 9237
	warp: 106.7 N weft: 383.5 N DIN EN ISO 9073-4
	all colours: 5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

colour	available widths (in cm)			
	320	420	520	620
303	•	•	•	
900	•	•	•	•
184	•*			
347	•*	•	•	

• presented in bales •* presented in rolls

Individual applications



card 1/1, effective: 02/2018

Heavy Canvas Cotton

Fields of application

.04 .05 .06



900



303

Fabrics up to 520 cm (205 inch) can be dyed any colour.

Heavy Canvas Cotton

Specifications

	840
	100 % cotton
	ca. 520 cm* ca. 205 inch*
	B1 DIN 4102
	ca. 430 g/m ² ca. 12.7 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: 26.1 l/(m ² s) 200 Pa: 50.7 l/(m ² s) DIN EN ISO 9237
	warp: 43.0 N weft: 42.0 N DIN EN ISO 9073-4
	light: 3-4 medium: 3 DIN EN ISO 105-B02
	cold cut

Individual applications



card 1/1, effective: 02/2018

Heavy Canvas

Trevira CS

Fields of application


.02 .04 .05 .06 .07



303



900



305

Heavy Canvas Trevira CS

Specifications

	841
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 520 cm ca. 205 inch
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1
	ca. 430 g/m ² ca. 12.7 oz/yd ²
	bales 30/ 60 m 33/ 67 yd
	100 Pa: 116 l/(m ² s) 200 Pa: 219 l/(m ² s) DIN EN ISO 9237
	warp: 20.9 N weft: 40.3 N DIN EN ISO 9073-4
	light: 5 medium: 5-6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications




card 1/1, effective: 02/2018

Artist Canvas

Fields of application

.02 .04 .05 .07

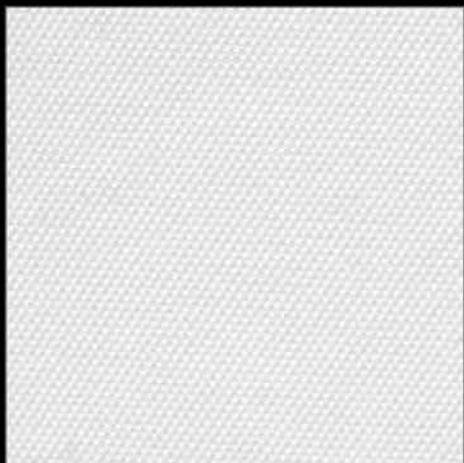

blank

501



digital print

Artist Canvas

Specifications

	897
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein)
	ca. 155/ 252/ 310/ 505 cm ca. 61/ 99/ 122/ 199 inch
	B-s1, d0 DIN EN 13501-1
	ca. 345 g/m ² ca. 10.2 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	UV, dye sublimation (direct/transfer)
	heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018


Flag Cloth TCS

Fields of application

.03 .04 .05 .06 .11



303




900



602



321



319



313



229




347

Flag Cloth TCS

Specifications

	108
	100 % Trevira CS crease-resistant
	ca. 160 cm ca. 63 inch
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 160 g/m ² ca. 4.7 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 612 l/(m ² s) 200 Pa: 996 l/(m ² s) DIN EN ISO 9237
	length: 15.4 N cross: 16.5 N DIN EN ISO 9073-4
	light: 5 medium: 5-6 dark: 4-5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications

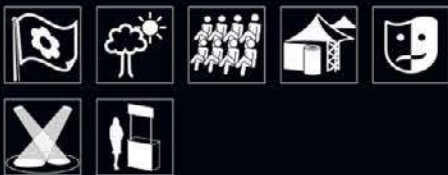

card 1/4, effective: 02/2018

Flag Cloth TCS

Fields of application

.03 .04 .05 .06 .11



719



733



731



753



464



460



478



440



223



211



207




402

Flag Cloth TCS

Specifications

	108
	100 % Trevira CS crease-resistant
	ca. 160 cm ca. 63 inch
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 160 g/m ² ca. 4.7 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 612 l/(m ² s) 200 Pa: 996 l/(m ² s) DIN EN ISO 9237
	length: 15.4 N cross: 16.5 N DIN EN ISO 9073-4
	light: 5 medium: 5-6 dark: 4-5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications

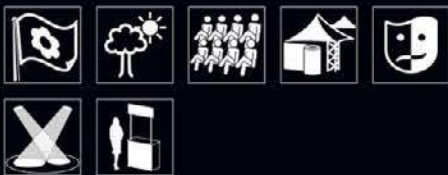

card 2/4, effective: 02/2018

Flag Cloth TCS

Fields of application

.03 .04 .05 .06 .11



305



707



509



604



517



610



569



640



666



682




680

Flag Cloth TCS

Specifications

	108
	100 % Trevira CS crease-resistant
	ca. 160 cm ca. 63 inch
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 160 g/m ² ca. 4.7 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 612 l/(m ² s) 200 Pa: 996 l/(m ² s) DIN EN ISO 9237
	length: 15.4 N cross: 16.5 N DIN EN ISO 9073-4
	light: 5 medium: 5-6 dark: 4-5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications

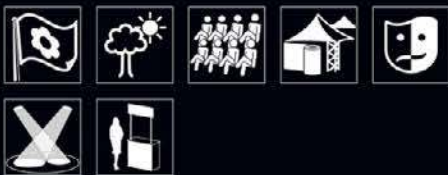

card 3/4, effective: 02/2018

Flag Cloth TCS

Fields of application

.03 .04 .05 .06 .11



102



106



638



142



156



186



636



184

Flag Cloth TCS

Specifications

	108
	100 % Trevira CS crease-resistant
	ca. 160 cm ca. 63 inch
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 160 g/m ² ca. 4.7 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 612 l/(m ² s) 200 Pa: 996 l/(m ² s) DIN EN ISO 9237
	length: 15.4 N cross: 16.5 N DIN EN ISO 9073-4
	light: 5 medium: 5-6 dark: 4-5 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 4/4, effective: 02/2018

Deco Molton

Fields of application

.04 .05 .06




347




303



331



305



317



501



731



519



751



577



464

Deco Molton

Specifications

	92
	100 % cotton
	ca. 130/ 300 cm ca. 51/ 116 inch
	B1 DIN 4102
	ca. 150 g/m ² ca. 4.4 oz/yd ²
	bales/ stacks 30/ 60 m 33/ 67 yd
	100 Pa: 563 l/(m ² s) 200 Pa: 1019 l/(m ² s) DIN EN ISO 9237
	warp: 10.3 N weft: 8.9 N DIN EN ISO 9073-4
	light: 3-4 medium: 4 dark: 5-6 DIN EN ISO 105-B02
	cold cut
	Fabrics in 130 cm (51 inch) width are available in ca. 100 colours.

Individual applications



card 1/2, effective: 02/2018

Deco Molton

Fields of application

.04 .05 .06



184



168



162



146



235



478



444



682



646



666

Deco Molton

Specifications

	92
	100 % cotton
	ca. 130/ 300 cm ca. 51/ 116 inch
	B1 DIN 4102
	ca. 150 g/m ² ca. 4.4 oz/yd ²
	bales/ stacks 30/ 60 m 33/ 67 yd
	100 Pa: 563 l/(m ² s) 200 Pa: 1019 l/(m ² s) DIN EN ISO 9237
	warp: 10.3 N weft: 8.9 N DIN EN ISO 9073-4
	light: 3-4 medium: 4 dark: 5-6 DIN EN ISO 105-B02
	cold cut
	Fabrics in 130 cm (51 inch) width are available in ca. 100 colours.

Individual applications



card 2/2, effective: 02/2018

Fair Molton

Fields of application

.04 .05 .06



303



347

Fair Molton

Specifications

	191
	100 % cotton
	ca. 260 cm ca. 102 inch
	B1 DIN 4102
	ca. 130 g/m ² ca. 3.8 oz/yd ²
	bales/ stacks 30/ 60 m 33/ 67 yd
	100 Pa: 830 l/(m ² s) 200 Pa: 1379 l/(m ² s) DIN EN ISO 9237
	warp: 7.0 N weft: 5.3 N DIN EN ISO 9073-4
	light: 4-5 dark: 5-6 DIN EN ISO 105-B02
	cold cut

Individual applications



card 1/1, effective: 02/2018

Stage Molton

Fields of application


.04 .05 .06



303



501



313



319



335



325



331



347

Stage Molton

Specifications

	190
	100 % cotton
	ca. 300 cm ca. 119 inch
	B1 DIN 4102
	ca. 300 g/m ² ca. 8.9 oz/yd ²
	bales/ stacks 30/ 60 m 33/ 66 yd
	100 Pa: 174 l/(m ² s) 200 Pa: 331 l/(m ² s) DIN EN ISO 9237
	warp: 23,1 N weft: 88,9 N DIN EN ISO 9073-4
	light: 3 medium: 3 dark: 5-6 DIN EN ISO 105-B02
	cold cut

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.55/ D (hanging waveless) 0.75/ C (100 % fullness)
--	---

* Type of assembly G-290 according to DIN EN ISO 354. Medium wall distance: 290 mm

card 1/2, effective: 02/2018

Stage Molton

Fields of application

.04 .05 .06



476



188



474



184



464



156

Stage Molton

Specifications

	190
	100 % cotton
	ca. 300 cm ca. 119 inch
	B1 DIN 4102
	ca. 300 g/m ² ca. 8.9 oz/yd ²
	bales/ stacks 30/ 60 m 33/ 66 yd
	100 Pa: 174 l/(m ² s) 200 Pa: 331 l/(m ² s) DIN EN ISO 9237
	warp: 23,1 N weft: 88,9 N DIN EN ISO 9073-4
	light: 3 medium: 3 dark: 5-6 DIN EN ISO 105-B02
	cold cut

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.55/ D (hanging waveless) 0.75/ C (100 % fullness)
--	---


* Type of assembly G-290 according to DIN EN ISO 354. Medium wall distance: 290 mm

card 2/2, effective: 02/2018

Softimage lightbox


Fields of application

.01 .02 .04 .05 .07 .10 .11

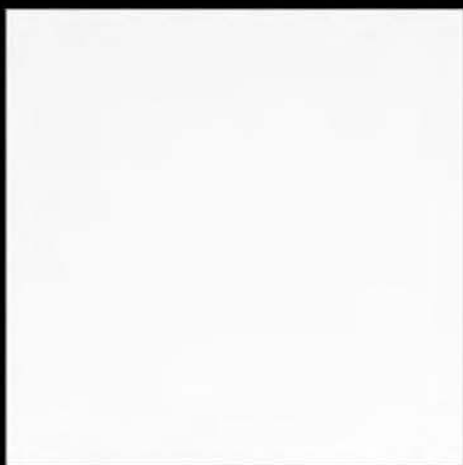

blank

303

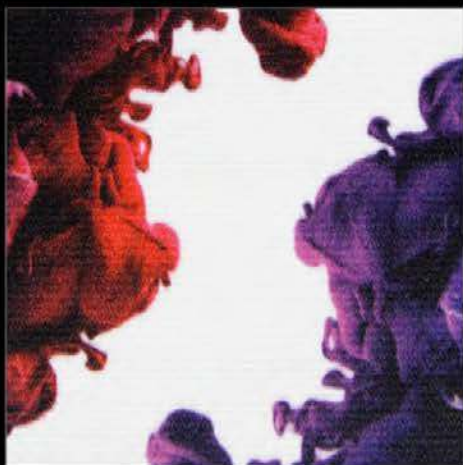

digital print

Softimage lightbox

Specifications

REF.

835



100 % polyester
OEKO-TEX® Standard 100 (Hohenstein)



ca. 103/ 155/ 252/ 310/ 505 cm
ca. 41/ 61/ 100/ 122/ 199 inch



B-s1, d0 DIN EN 13501-1



ca. 205 g/m²
ca. 6.1 oz/yd²



rolls
25/ 50 m
27/ 55 yd



length: 290.7 N
cross: 1119.3 N
DIN EN ISO 13934-1



length: 65.4 %
cross: 34.0 %
DIN EN ISO 13934-1



blank: 5
DIN EN ISO 105-B02



blank: 35.7 %
DIN EN 410



blank: 93.7
DIN 5033-1



length: 2.2 %
cross: 0.9 %
DIN EN 14704-1



UV, certified for **HP Latex Inks**



cold, heat, ultrasonic cut

Individual applications




card 1/1, effective: 02/2018

Stage Velvet

Fields of application

.03 .04 .05 .06 .10



317



347



464



184



476

Stage Velvet

Specifications

	646
	100 % Trevira CS
	ca. 140 cm ca. 55 inch
	B1 permanent DIN 4102
	ca. 310 g/m ² ca. 9.1 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 196 l/(m ² s) 200 Pa: 375 l/(m ² s) DIN EN ISO 9237
	warp: 33.0 N weft: 55.3 N DIN EN ISO 9073-4
	light: 4 medium: 4 dark: 5-6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.50/ D (hanging waveless) 0.70/ C (100 % fullness)
--	---


* Type of assembly G-290 according to DIN EN ISO 354. Medium wall distance: 290 mm

card 1/1, effective: 02/2018

PES Theatre soft


Fields of application

.02 .04 .05 .06 .07

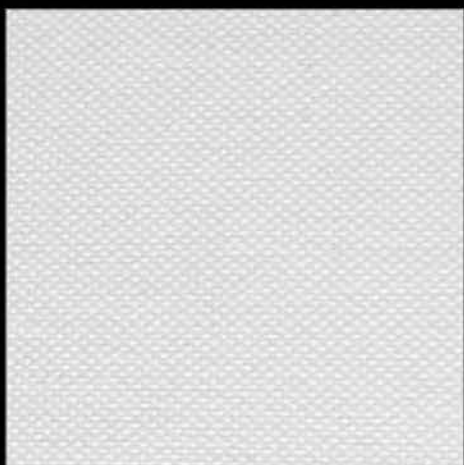

front

303

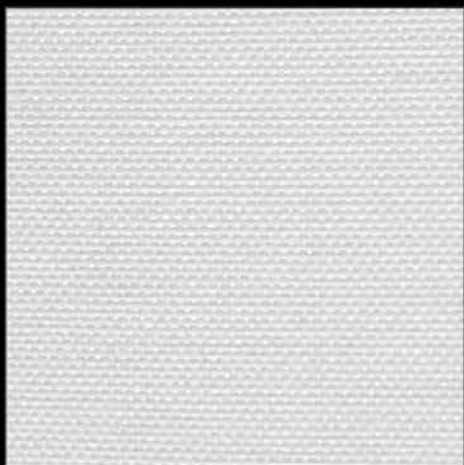

front

501



digital print

PES Theatre soft

Specifications

REF.

501



100 % polyester
OEKO-TEX® Standard 100 (Hohenstein)



ca. 310/ 505 cm
ca. 122/ 199 inch



B-s1, d0 DIN EN 13501-1



ca. 315 g/m²
ca. 13.3 oz/yd²



rolls
25/ 50 m
27/ 55 yd



303: UV, solvent
501: UV, certified for **HP Latex Inks**,
dye sublimation (direct/transfer)



heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Blackout VI


Fields of application

.02 .03 .04 .05 .06 .07 .08



front

303

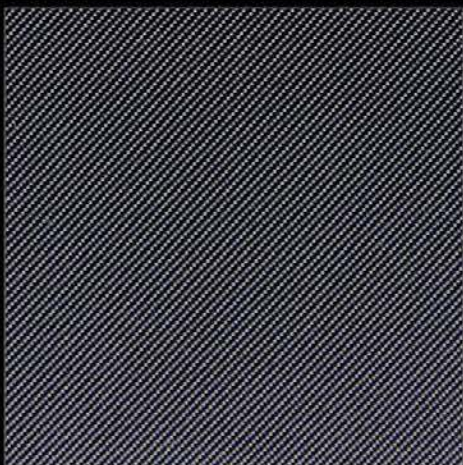

back



digital print

Blackout VI

Specifications

	827
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein) blackout
	ca. 155/ 310 cm ca. 61/ 122 inch
	B-s1, d0 DIN EN 13501-1
	ca. 330 g/m ² ca. 9.7 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	100 Pa: 21.1 l/(m ² s) 200 Pa: 41.0 l/(m ² s) DIN EN ISO 9237
	warp: 161.6 N weft: 55.0 N DIN EN ISO 9073-4
	white (front): 5 black (back): 6 DIN EN ISO 105-B02
	white (front): 0.8 % black (back): 0.6 % DIN EN 410
	white (front): 0.0 % black (back): 0.0 % DIN EN 410
	white (front): 89.8 black (back): 39.2
	UV, dye sublimation (direct/transfer)
	heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Blackout I


Fields of application

.02 .04 .05 .06 .07 .08



front

301

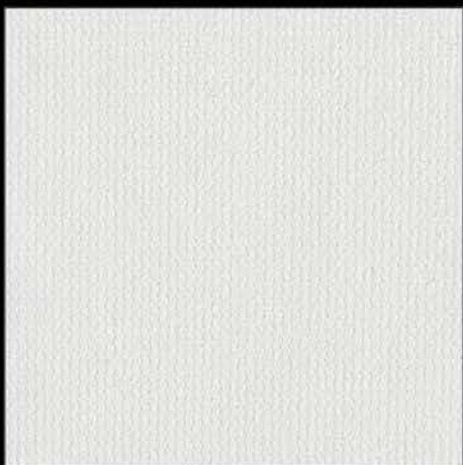

back



digital print

Blackout I

Specifications

	827
	100 % polyester blackout
	ca. 155/ 310/ 505 cm ca. 61/ 122/ 199 inch
	B-s1, d0 DIN EN 13501-1
	ca. 290 g/m ² ca. 8.5 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	100 Pa: 10.8 l/(m ² s) 200 Pa: 23.1 l/(m ² s) DIN EN ISO 9237
	length: 27.9 N cross: 16.2 N DIN EN ISO 9073-4
	length: 974.5 N/ 52.5 % cross: 434.8 N/ 31.6 % DIN EN ISO 13934-1
	blank: 6 DIN EN ISO 105-B02
	blank: 0.0 % DIN EN 410
	blank: 90.53
	UV
	cold, heat, ultrasonic cut

Individual applications




card 1/1, effective: 02/2018

Graphite Back


Fields of application

.02 .04 .05 .07 .08

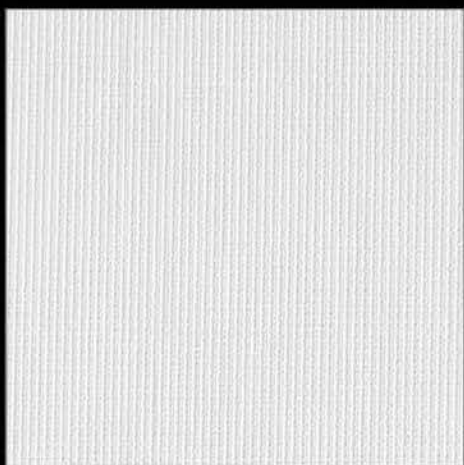

front

303

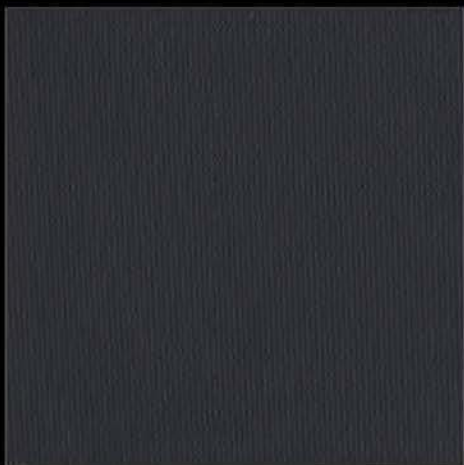

back



digital print

Graphite Back

Specifications

REF.

847



100 % polyester
blackout



ca. 103/ 310/ 505 cm
ca. 41/ 122/ 199 inch



B-s1, d0 DIN EN 13501-1



ca. 270 g/m²
ca. 8.0 oz/yd²



rolls
25/ 50 m
27/ 55 yd



UV



cold, heat, ultrasonic cut

Specs

light density (gain factor)
0.81 DIN 5036-3

Individual applications




card 1/1, effective: 02/2018

Black Back


Fields of application

.02 .04 .05 .06 .07 .08

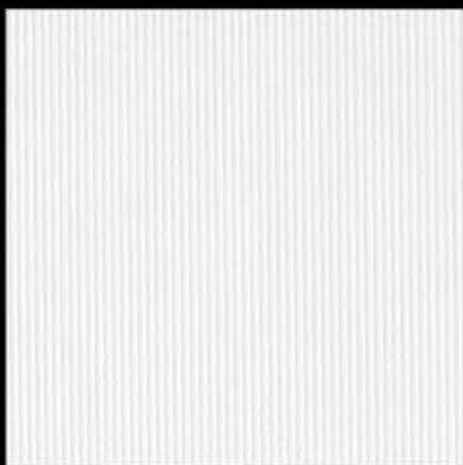


front

303

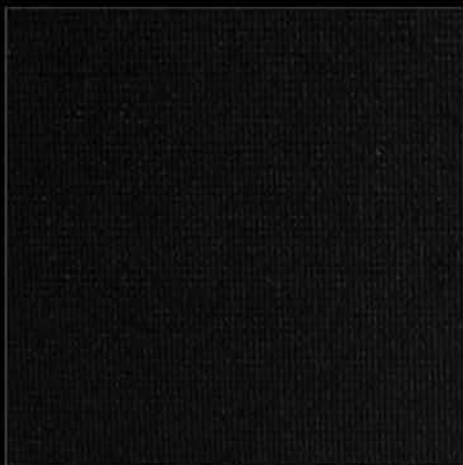

back

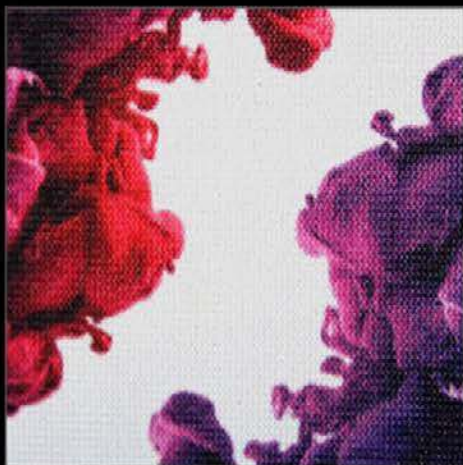

digital print

Black Back

Specifications

	855
	100 % polyester blackout
	ca. 103/ 310/ 505 cm ca. 41/ 122/ 199 inch
	B-s1, d0 DIN EN 13501-1
	ca. 270 g/m ² ca. 8.0 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	blank: 2.2 % DIN EN 410
	length: 643.8 N cross: 437.7 N DIN EN ISO 13934-1
	length: 52.5 % cross: 31.6 % DIN EN ISO 13934-1
	front: 92.04
	front: 5 DIN EN ISO 105-B02
	UV
	cold, heat, ultrasonic cut
	light density (gain factor) 0.81 DIN 5036-3

Individual applications



card 1/1, effective: 02/2018

Floory

Fields of application


.04 .05 .06 .10



315



303



317



319



321



331



329



333



337



335



347

Floory

Specifications



507



100 % PP



ca. 200/ 400 cm
ca. 79/ 158 inch



Bfl-s1 DIN EN 13501-1



ca. 520 g/m²
ca. 15.4 oz/yd²



rolls
30/ 50 m
33/ 55 yd



ca. 2 mm



cold, heat, ultrasonic cut

Also available with protective film

Individual applications



card 1/4, effective: 02/2018

Floory

Fields of application

.04 .05 .06 .10



470



478



466




432



739



464



731



444



616

Floory

Specifications



507



100 % PP



ca. 200/ 400 cm
ca. 79/ 158 inch



Bfl-s1 DIN EN 13501-1



ca. 520 g/m²
ca. 15.4 oz/yd²



rolls
30/ 50 m
33/ 55 yd



ca. 2 mm



cold, heat, ultrasonic cut

Also available with protective film

Individual applications



card 2/4, effective: 02/2018

Floory

Fields of application

.04 .05 .06 .10



581




571




577



517



737




523



642



674



666



682



636



640

Floory

Specifications



507



100 % PP



ca. 200/ 400 cm
ca. 79/ 158 inch



Bfl-s1 DIN EN 13501-1



ca. 520 g/m²
ca. 15.4 oz/yd²



rolls
30/ 50 m
33/ 55 yd



ca. 2 mm



cold, heat, ultrasonic cut

Also available with protective film

Individual applications



card 3/4, effective: 02/2018

Floory

Fields of application

.04 .05 .06 .10



156



162



176



632




168



118



184



223

Floory

Specifications



507



100 % PP



ca. 200/ 400 cm
ca. 79/ 158 inch



Bfl-s1 DIN EN 13501-1



ca. 520 g/m²
ca. 15.4 oz/yd²



rolls
30/ 50 m
33/ 55 yd



ca. 2 mm



cold, heat, ultrasonic cut

Also available with protective film

Individual applications




card 4/4, effective: 02/2018

SILENCIO® Size 5 print media


Fields of application

.01 .02 .04 .05 .06 .07 .08
.11

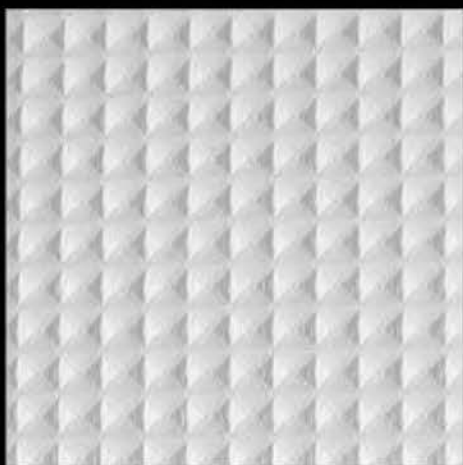

blank

301

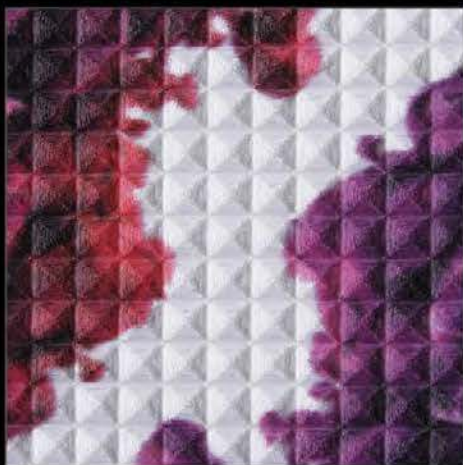

digital print

SILENCIO® Size 5 print media

Specifications

	658
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 315/ 505 cm ca. 124/ 199 inch
	B-s1, d0 DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 300 g/m ² ca. 10.3 oz/yd ²
	rolls 25 m 27 yd
	ca. 1.5 mm
	warp: 1794.2 N weft: 1207.5 N DIN EN ISO 1421
	warp: 41.4 % weft: 22.8 % DIN EN ISO 1421
	UV, certified for HP Latex Inks
	cold, heat cut

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.85/ B
--	--


* Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 2 x 20 mm ISOVER SSP 2 and 10 mm airspace.

card 1/1, effective: 02/2018


SILENCIO® Size 5 colours

Fields of application


.01 .02 .04 .05 .06 .07 .08
.11



311




305



303



507




339




347



333



589



945



947

SILENCIO® Size 5 colours

Specifications

	662
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 320/ 520 cm ca. 126/ 205 inch
	B-s1, d0 permanent DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 350 g/m ² ca. 10.3 oz/yd ²
	rolls 25 m 27 yd
	ca. 1.5 mm
	100 Pa: 351 l/(m ² s) 200 Pa: 566 l/(m ² s) DIN EN ISO 9237
	warp: 1799.4 N (69.9 N) weft: 1322.4 N (90.3 N) DIN EN ISO 1421 (13937-2)
	warp: 53.3 % weft: 26.6 % DIN EN ISO 1421
	all colours: 6 DIN EN ISO 105-B02
	cold, heat cut

Individual applications




card 1/2, effective: 02/2018

SILENCIO® Size 5 colours

Fields of application


.01 .02 .04 .05 .06 .07 .08
.11



525




501



523




547



739




733



466



235



162



104

SILENCIO® Size 5 colours

Specifications

	662
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 320/ 520 cm ca. 126/ 205 inch
	B-s1, d0 permanent DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 350 g/m ² ca. 10.3 oz/yd ²
	rolls 25 m 27 yd
	ca. 1.5 mm
	100 Pa: 351 l/(m ² s) 200 Pa: 566 l/(m ² s) DIN EN ISO 9237
	warp: 1799.4 N (69.9 N) weft: 1322.4 N (90.3 N) DIN EN ISO 1421 (13937-2)
	warp: 53.3 % weft: 26.6 % DIN EN ISO 1421
	all colours: 6 DIN EN ISO 105-B02
	cold, heat cut

Individual applications




card 2/2, effective: 02/2018

SILENCIO® Size 10 print media

Fields of application

.01 .02 .04 .05 .06 .07 .08
.11

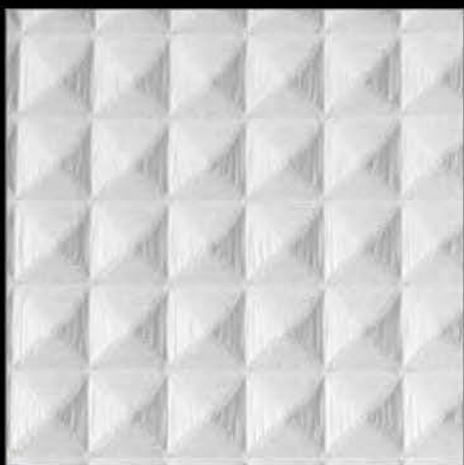

blank

301



digital print

SILENCIO® Size 10 print media

Specifications

	REF. 673
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 315/ 505 cm ca. 124/ 199 inch
	B-s1, d0 DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 300 g/m ² ca. 10.3 oz/yd ²
	rolls 25 m 27 yd
	ca. 2.5 mm
	warp: 1725.2 N weft: 1151.7 N DIN EN ISO 1421
	warp: 44.3 % weft: 18.0 % DIN EN ISO 1421
	UV, certified for HP Latex Inks
	cold, heat cut

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.85/ B
--	--

* Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 2 x 20 mm ISOVER SSP 2 and 10 mm airspace.

card 1/1, effective: 02/2018


SILENCIO® Size 10 colours

Fields of application


.01 .02 .04 .05 .06 .07 .08
.11



311




305




303



507



339



347



333



589



945



947

SILENCIO® Size 10 colours

Specifications

	655
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 320/ 520 cm ca. 126/ 205 inch
	B-s1, d0 permanent DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 350 g/m ² ca. 10.3 oz/yd ²
	rolls 25 m 27 yd
	ca. 2.5 mm
	100 Pa: 404 l/(m ² s) 200 Pa: 669 l/(m ² s) DIN EN ISO 9237
	warp: 1791.6 N (136.1 N) weft: 1289.9 N (147.2 N) DIN EN ISO 1421 (13937-2)
	warp: 50.7 % weft: 72.2 % DIN EN ISO 13934-1
	all colours: 6 DIN EN ISO 105-B02
	cold, heat cut

Individual applications



card 1/2, effective: 02/2018

SILENCIO® Size 10 colours

Fields of application

.01 .02 .04 .05 .06 .07 .08
.11



525



501



523



547



739



733



466



235



162



104

SILENCIO® Size 10 colours

Specifications

	655
	100 % Trevira CS OEKO-TEX® Standard 100 (Hohenstein)
	ca. 320/ 520 cm ca. 126/ 205 inch
	B-s1, d0 permanent DIN EN 13501-1 M1 NF P 92 503 - 507
	ca. 350 g/m ² ca. 10.3 oz/yd ²
	rolls 25 m 27 yd
	ca. 2.5 mm
	100 Pa: 404 l/(m ² s) 200 Pa: 669 l/(m ² s) DIN EN ISO 9237
	warp: 1791.6 N (136.1 N) weft: 1289.9 N (147.2 N) DIN EN ISO 1421 (13937-2)
	warp: 50.7 % weft: 72.2 % DIN EN ISO 13934-1
	all colours: 6 DIN EN ISO 105-B02
	cold, heat cut

Individual applications



card 2/2, effective: 02/2018


AKUSTICO®

Fields of application


.01 .02 .03 .04 .05 .06 .07
.08 .10 .11 .12



347




331



311



329



309



545




303



727



541



731



638

AKUSTICO®

Specifications

	589	
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein)	
	ca. 308 cm ca. 121 inch	
	B-s1, d0 M1	DIN EN 13501-1 NF P 92-503
	ca. 270 g/m ² ca. 8.0 oz/yd ²	
	rolls 30/ 60 m 33/ 67 yd	
	100 Pa: 195 l/(m ² s) 200 Pa: 342 l/(m ² s) DIN EN ISO 9237	
	warp: 2668 N/ 48.5 % (97 N) weft: 1589 N/ 41.7 % (123 N) DIN EN ISO 1421 (13937-2)	
	light: 5 medium: 5 dark: 6 DIN EN ISO 105-B02	
	UV, dye sublimation (direct/transfer), profiled for HP Latex Inks	
	heat, ultrasonic cut	

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.90/ A
--	--

* Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 40 mm ISOVER SSP 2 and 10 mm airspace.

card 1/2, effective: 02/2018

AKUSTICO®

Fields of application

.01 .02 .03 .04 .05 .06 .07
.08 .10 .11 .12



235



628



440



642



466



162



digital print

303

AKUSTICO®

Specifications

	589	
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein)	
	ca. 308 cm ca. 121 inch	
	B-s1, d0 M1	DIN EN 13501-1 NF P 92-503
	ca. 270 g/m ² ca. 8.0 oz/yd ²	
	rolls 30/ 60 m 33/ 67 yd	
	100 Pa: 195 l/(m ² s) 200 Pa: 342 l/(m ² s) DIN EN ISO 9237	
	warp: 2668 N/ 48.5 % (97 N) weft: 1589 N/ 41.7 % (123 N) DIN EN ISO 1421 (13937-2)	
	light: 5 medium: 5 dark: 6 DIN EN ISO 105-B02	
	UV, dye sublimation (direct/transfer), profiled for HP Latex Inks	
	heat, ultrasonic cut	

Individual applications



Certifications

	Acoustic absorption value α_w /class*: 0.90/ A
--	--


* Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 40 mm ISOVER SSP 2 and 10 mm airspace.

card 2/2, effective: 02/2018

Shape

Fields of application

.02 .04 .05 .06 .08 .10

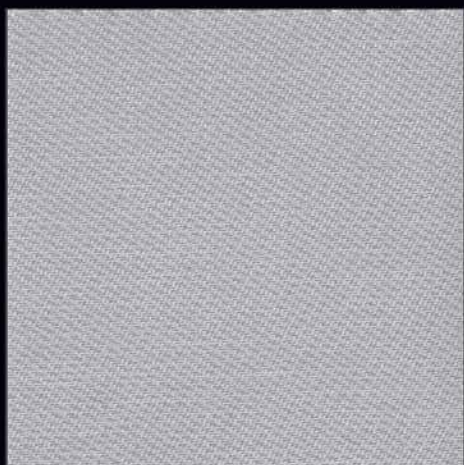

blank

501



digital print

Shape

Specifications

REF.

435



50 % polyester

50 % stainless steel

OEKO-TEX® Standard 100 (Hohenstein)



ca. 320 cm

ca. 126 inch



ca. 200 g/m²

ca. 5.9 oz/yd²



rolls

50 m

55 yd



ca. 180 µm

Specs

repeatedly malleable

light diffusive and reflective properties

EMV compliant



UV, solvent



cold cut

Individual applications



card 1/1, effective: 02/2018

TCS Voile

Fields of application

.04 .05 .06



TCS Voile

Specifications

	804
	100 % Trevira CS
	ca. 320 cm* ca. 126 inch*
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 45 g/m ² ca. 1.3 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: > 3000 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 10.2 N weft: 10.4 N DIN EN ISO 9073-4
	all colours: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

* Colours 900 and 303 are also presented on bale form in ca. 520 cm (205 inch) width.

Individual applications




card 1/1, effective: 02/2018

Ripstop


Fields of application

.02 .04 .05 .06 .07 .10

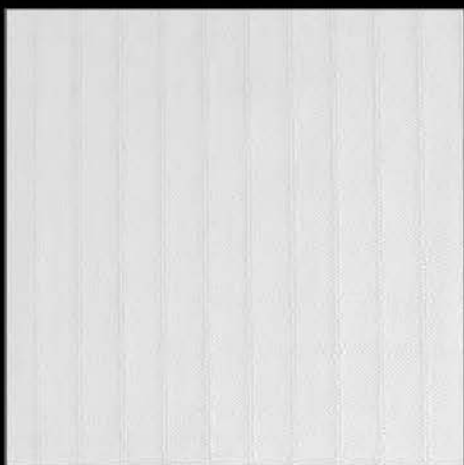

blank

303

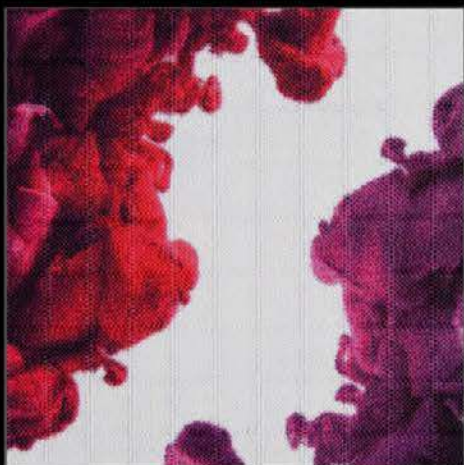

digital print

Ripstop

Specifications

	807
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein) crease-resistant
	ca. 310/ 505 cm ca. 121/ 199 inch
	B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 65 g/m ² ca. 2.0 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	100 Pa: 73 l/(m ² s) 200 Pa: 125 l/(m ² s) DIN EN ISO 9237
	warp: 582 N (18.5 N) weft: 652 N (21.7 N) DIN EN ISO 13934-1 (13937-2)
	blank: 5 DIN EN ISO 105-B02
	UV, dye sublimation (direct/transfer)
	ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Polyester Taffeta FR

Fields of application

.03 .04 .05 .06 .10



501



307



303



311



333



347

Polyester Taffeta FR

Specifications

	275
	100 % polyester FR
	ca. 150/ 300 cm ca. 59/ 118 inch
	B-s1, d0 DIN EN 13501-1
	ca. 70 g/m ² ca. 2.1 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 93 l/(m ² s) 200 Pa: 159 l/(m ² s) DIN EN ISO 9237
	warp: 10.2 N weft: 6.9 N DIN EN ISO 9073-4
	light: 5-6 medium: 5-6 dark: 4 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 1/3, effective: 02/2018

Polyester Taffeta FR

Fields of application

.03 .04 .05 .06 .10



184



162



235




156



684



132



666



650

Polyester Taffeta FR

Specifications

	275
	100 % polyester FR
	ca. 150/ 300 cm ca. 59/ 118 inch
	B-s1, d0 DIN EN 13501-1
	ca. 70 g/m ² ca. 2.1 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 93 l/(m ² s) 200 Pa: 159 l/(m ² s) DIN EN ISO 9237
	warp: 10.2 N weft: 6.9 N DIN EN ISO 9073-4
	light: 5-6 medium: 5-6 dark: 4 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 2/3, effective: 02/2018

Polyester Taffeta FR

Fields of application

.03 .04 .05 .06 .10



555



569



466



476



460



444



739



402



731



717



507

Polyester Taffeta FR

Specifications

	275
	100 % polyester FR
	ca. 150/ 300 cm ca. 59/ 118 inch
	B-s1, d0 DIN EN 13501-1
	ca. 70 g/m ² ca. 2.1 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 93 l/(m ² s) 200 Pa: 159 l/(m ² s) DIN EN ISO 9237
	warp: 10.2 N weft: 6.9 N DIN EN ISO 9073-4
	light: 5-6 medium: 5-6 dark: 4 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 3/3, effective: 02/2018

TCS Taffeta

Fields of application

.04 .05 .06



303



900



507



313



640



646



678



628



156



140



184



347

TCS Taffeta

Specifications

	REF. 808
	100 % Trevira CS
	ca. 308 cm* ca. 121 inch*
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 75 g/m ² ca. 2.2 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 122 l/(m ² s) 200 Pa: 218 l/(m ² s) DIN EN ISO 9237
	warp: 21.0 N weft: 13.1 N DIN EN ISO 9073-4
	light: 5-6 medium: 6 dark: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

* Colours 900 and 303 are also presented on bale form in ca. 520 cm (205 inch) width.

Individual applications



card 1/2, effective: 02/2018

TCS Taffeta

Fields of application

.04 .05 .06



555



464



444



460



731



545

TCS Taffeta

Specifications

	REF. 808
	100 % Trevira CS
	ca. 308 cm* ca. 121 inch*
	B1 permanent DIN 4102 B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 75 g/m ² ca. 2.2 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 122 l/(m ² s) 200 Pa: 218 l/(m ² s) DIN EN ISO 9237
	warp: 21.0 N weft: 13.1 N DIN EN ISO 9073-4
	light: 5-6 medium: 6 dark: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

* Colours 900 and 303 are also presented on bale form in ca. 520 cm (205 inch) width.

Individual applications



card 2/2, effective: 02/2018


Stretch Twill soft

Fields of application

.01 .02 .04 .05 .07 .10 .11



303



347



digital print

Stretch Twill

soft

Specifications

	REF. 620
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein)
	ca. 103/ 155/ 310 cm ca. 41/ 61/ 122 inch
	B-s1, d0 DIN EN 13501-1 M1 NF P 92-503
	ca. 115 g/m ² ca. 3.4 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	100 Pa, black: 59 white: 36 l/(m ² s) 200 Pa, black: 109 white: 73 l/(m ² s) DIN EN ISO 9237
	warp, black: 19.8 white: 20.7 N weft, black: 19.5 white: 23.3 N DIN EN ISO 9073-4
	warp: 1242.4 N/ 33.3 % weft: 730.7 N/ 39.6 % DIN EN ISO 13934-1
	white: 26.9 % DIN EN 410
	white: 0.1 % DIN EN 410
	black: 4 white: 5 DIN EN ISO 105-B02
	UV, dye sublimation (direct/transfer)
	ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Kristall FR

Fields of application

.03 .04 .05 .06 .10



476



569



229



466



444



462



402



547



511



751



731

Kristall FR

Specifications

	270
	100 % polyester FR
	ca. 150/ 308 cm ca. 59/ 121 inch
	B-s1, d0 DIN EN 13501-1
	ca. 80 g/m ² ca. 2.4 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 52 l/(m ² s) 200 Pa: 98 l/(m ² s) DIN EN ISO 9237
	warp: 25.8 N weft: 15.8 N DIN EN ISO 9073-4
	light: 5-6 medium: 5 dark: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 1/3, effective: 02/2018

Kristall FR

Fields of application

.03 .04 .05 .06 .10



347



235



333



166



319



184



311



144



303



501

Kristall FR

Specifications

	270
	100 % polyester FR
	ca. 150/ 308 cm ca. 59/ 121 inch
	B-s1, d0 DIN EN 13501-1
	ca. 80 g/m ² ca. 2.4 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 52 l/(m ² s) 200 Pa: 98 l/(m ² s) DIN EN ISO 9237
	warp: 25.8 N weft: 15.8 N DIN EN ISO 9073-4
	light: 5-6 medium: 5 dark: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 2/3, effective: 02/2018

Kristall FR

Fields of application

.03 .04 .05 .06 .10



684



650



666



606

Kristall FR

Specifications

	270
	100 % polyester FR
	ca. 150/ 308 cm ca. 59/ 121 inch
	B-s1, d0 DIN EN 13501-1
	ca. 80 g/m ² ca. 2.4 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 52 l/(m ² s) 200 Pa: 98 l/(m ² s) DIN EN ISO 9237
	warp: 25.8 N weft: 15.8 N DIN EN ISO 9073-4
	light: 5-6 medium: 5 dark: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications




card 3/3, effective: 02/2018

Cotton Satin

Fields of application

.04 .05 .06 .10

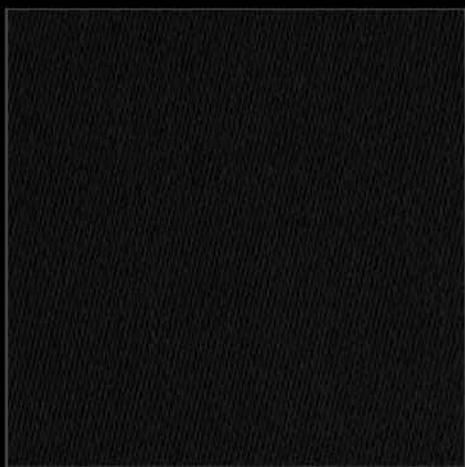

347

Cotton Satin

Specifications

	182
	100 % cotton
	ca. 120 cm ca. 47 inch
	B1 DIN 4102
	ca. 275 g/m ² ca. 8.1 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 41.0 l/(m ² s) 200 Pa: 73.2 l/(m ² s) DIN EN ISO 9237
	warp: 20.9 N weft: 22.4 N DIN EN ISO 9073-4
	all colours: 6 DIN EN ISO 105-B02
	cold cut

Individual applications



card 1/1, effective: 02/2018

Stage

Fields of application

.03 .04 .05 .06 .10



Stage

Specifications

	583
	52.5 % Trevira CS 47.5 % polyamide
	ca. 320 cm ca. 126 inch
	B-s1, d0 DIN EN 13501-1
	ca. 22 g/m ² ca. 0.7 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: > 3000 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 7.1 N weft: 4.7 N DIN EN ISO 9073-4
	all colours: 6 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Superior

Fields of application

.04 .05 .06 .10



8906

901

8907

917

525

547

464

444

418



915

945

339

636

676

999

104

632

178

Superior

Specifications

	REF. 432
	86 % polyester 7 % Trevira CS, 7 % polyamide OEKO-TEX® Standard 100 (Hohenstein)
	ca. 160 cm* ca. 63 inch*
	B-s1, d0 DIN EN 13501-1
	ca. 95 g/m ² ca. 2.8 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 2649 l/(m ² s) 200 Pa: > 3000 l/(m ² s) DIN EN ISO 9237
	warp: 14.1 N weft: 281.1 N DIN EN ISO 9073-4
	all colours: 3 DIN EN ISO 105-B02
	cold, heat, ultrasonic cut

* colours 8907 and 8906 also in 320 cm (126 inch)

Individual applications



card 1/1, effective: 02/2018

Reflex

Fields of application

.04 .05 .06 .07 .10



Reflex

Specifications



405



100 % polyester



ca. 320 cm
ca. 126 inch



B1 permanent DIN 4102



ca. 51 g/m²
ca. 1.5 oz/yd²



rolls
30 m
33 yd



100 Pa: 3041 l/(m²s)
200 Pa: > 4300 l/(m²s)
DIN EN ISO 9237



warp: 39.4 N
weft: 31.3 N
DIN EN ISO 9073-4



light: 5 medium: 5-6 dark: 4-5
DIN EN ISO 105-B02



cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Stretchtex

Fields of application

.02 .04 .05 .06 .07 .10



347



319



333



307



303



444



509



476



652



466



644



162

Stretchtex

Specifications

	485
	80 % Nylon, 20 % Spandex crease-resistant, stretchable
	ca. 150 cm ca. 59 inch
	B-s2, d0 optional DIN EN 13501-1
	ca. 210 g/m ² ca. 6.2 oz/yd ²
	rolls 30 m 33 yd
	100 Pa: 1090 l/(m ² s) 200 Pa: 2052 l/(m ² s) DIN EN ISO 9237
	warp: 25.1 N weft: 32.2 N DIN EN ISO 9073-4
	light: 4 medium: 4 dark: 6 DIN EN ISO 105-B02
	cold cut

Individual applications




card 1/1, effective: 02/2018

Softimage elastico

Fields of application

.02 .04 .05 .07

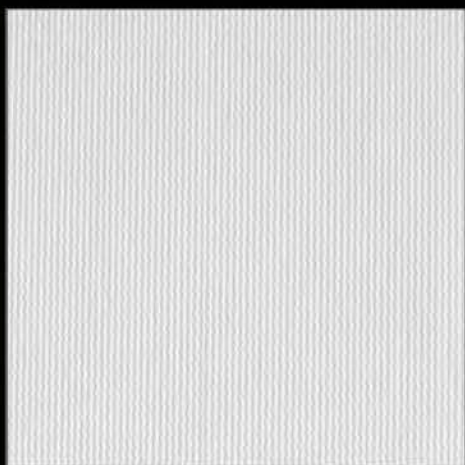

blank

303



digital print

Softimage elastico

Specifications

	REF. 873
	100 % polyester OEKO-TEX® Standard 100 (Hohenstein) crease-resistant, stretchable
	ca. 103/ 155/ 252/ 310/ 390 cm ca. 41/ 61/ 100/ 122/ 154 inch
	B-s1, d0 DIN EN 13501-1
	ca. 175 g/m ² ca. 5.2 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	warp: 384 N / 464 N* weft: 995 N / 1024 N* DIN EN ISO 13934-1
	blank: 6 DIN EN ISO 105-B02
	warp: 6.3 % / 16.4 %* weft 12.3 % / 6.9 %* DIN EN 14704-1
	UV, dye sublimation (direct/transfer)
	cold, heat, ultrasonic cut

* only for 252 cm (100 inch) width

Individual applications



card 1/1, effective: 02/2018


Lurex Satin

Fields of application


.04 .05 .06 .10



915



947




945




907




906



943



416



555



480



347

Lurex Satin

Specifications



371



75 % polyester, 25 % polyamide



ca. 160/ 320/ 430* cm
ca. 63/ 125/ 170* inch
* on request



B-s1, d0 optional DIN EN 13501-1



ca. 80 g/m²
ca. 2.4 oz/yd²



rolls
30/ 60 m
33/ 67 yd



100 Pa: 108 l/(m²s)
200 Pa: 193 l/(m²s)
DIN EN ISO 9237



warp: 41.8 N
weft: 47.6 N
DIN EN ISO 9073-4



light: 6 medium: 3 dark: 6
DIN EN ISO 105-B02



cold, heat cut

Individual applications




card 1/2, effective: 02/2018


Lurex Satin

Fields of application


.04 .05 .06 .10




168




466



162



444



628

Lurex Satin

Specifications



371



75 % polyester, 25 % polyamide



ca. 160/ 320/ 430* cm
ca. 63/ 125/ 170* inch
* on request



B-s1, d0 optional DIN EN 13501-1



ca. 80 g/m²
ca. 2.4 oz/yd²



rolls
30/ 60 m
33/ 67 yd



100 Pa: 108 l/(m²s)
200 Pa: 193 l/(m²s)
DIN EN ISO 9237



warp: 41.8 N
weft: 47.6 N
DIN EN ISO 9073-4



light: 6 medium: 3 dark: 6
DIN EN ISO 105-B02



cold, heat cut

Individual applications



card 2/2, effective: 02/2018

Lurex Satin Crash (formerly Crazy)

Fields of application

.04 .05 .06 .10



915



947



945



907




906



943



416



555



480



347

Lurex Satin Crash (formerly Crazy)

Specifications

	205
	75 % polyester, 25 % polyamide crease-resistant
	ca. 120/ 270* cm ca. 48/ 107* inch
	All colours can be produced with a flame retardant finish
	ca. 105 g/m ² ca. 3.1 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 355 l/(m ² s) 200 Pa: 588 l/(m ² s) DIN EN ISO 9237
	warp: 33.2 N weft: 30.8 N DIN EN ISO 9073-4
	light: 3 medium: 3 dark: 6 DIN EN ISO 105-B02
	cold, heat cut

* 270 cm width only on request.
Minimum order quantity of 500 m.

Individual applications




card 1/2, effective: 02/2018


Lurex Satin Crash (formerly Crazy)

Fields of application

.04 .05 .06 .10



168



466



162



444



628

Lurex Satin Crash (formerly Crazy)

Specifications

	205
	75 % polyester, 25 % polyamide crease-resistant
	ca. 120/ 270* cm ca. 48/ 107* inch
	All colours can be produced with a flame retardant finish
	ca. 105 g/m ² ca. 3.1 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 355 l/(m ² s) 200 Pa: 588 l/(m ² s) DIN EN ISO 9237
	warp: 33.2 N weft: 30.8 N DIN EN ISO 9073-4
	light: 3 medium: 3 dark: 6 DIN EN ISO 105-B02
	cold, heat cut

* 270 cm width only on request.
Minimum order quantity of 500 m.

Individual applications




card 2/2, effective: 02/2018

Casino

Fields of application


.04 .05 .06 .10




945



915




907




666




947



674




943



414



905



233



466



162

Casino

Specifications

	582
	100 % polyester
	ca. 308 cm ca. 121 inch
	B-s1, d0 DIN EN 13501-1
	ca. 95 g/m ² ca. 2.8 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	100 Pa: 673 l/(m ² s) 200 Pa: 1065 l/(m ² s) DIN EN ISO 9237
	warp: 322 N weft: 123 N DIN EN ISO 9073-4
	light: 6 medium: 5-6 dark: 4-5 DIN EN ISO 105-B02
	cold, heat cut

Individual applications



card 1/1, effective: 02/2018

Vegas

Fields of application

.04 .05 .06 .10



906




547



907



466



444



347



104



184



670

Vegas

Specifications



239



55 % Nylon
45 % polyester



ca. 112 cm
ca. 44 inch



B1 optional DIN 4102



ca. 120 g/m²
ca. 3.5 oz/yd²



rolls
30 m
33 yd



100 Pa: > 3000 l/(m²s)
200 Pa: > 3000 l/(m²s)
DIN EN ISO 9237



light: 5-6 medium: 3 dark: 5-6
DIN EN ISO 105-B02



cold cut

Individual applications



card 1/1, effective: 02/2018

Flashy Kroko S

Fields of application

.04 .05 .06 .10



8809



8836



8807



8832



8837



8834



8833



8835

Flashy Kroko S

Specifications



695



100 % polyester



ca. 150 cm
ca. 59 inch



B-s1, d0 DIN EN 13501-1



ca. 140 g/m²
ca. 4.1 oz/yd²



rolls
30 m
33 yd



cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018


Shiny Alligator S

Fields of application

.04 .05 .06 .10



8806



8800




8802



8809



8834



8839

Shiny Alligator S

Specifications



696



100 % polyester



ca. 150 cm
ca. 59 inch



B-s1, d0 DIN EN 13501-1



ca. 140 g/m²
ca. 4.1 oz/yd²



rolls
30 m
33 yd



cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018


Lucid Kaiman S

Fields of application

.04 .05 .06 .10



8800




8806



8809



8836



8839

Lucid Kaiman S

Specifications



698



100 % polyester



ca. 150 cm
ca. 59 inch



B-s1, d0 DIN EN 13501-1



ca. 140 g/m²
ca. 4.1 oz/yd²



rolls
30 m
33 yd



cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Paradise Python S

Fields of application

.04 .05 .06 .10



8834



8831



8800



8809



8802



8855



8806

Paradise Python S

Specifications



697



100 % polyester



ca. 150 cm
ca. 59 inch



B-s1, d0 DIN EN 13501-1



ca. 140 g/m²
ca. 4.1 oz/yd²



rolls
30 m
33 yd



cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

Lumifol B1

Fields of application

.04 .05 .06 .09



909

547

442

235

178

156

901

666

466

349

Lumifol B1

Specifications



11



100 % PVC metallised



ca. 150 cm
ca. 59 inch



B1 permanent DIN 4102



ca. 50 g/m²
ca. 1.5 oz/yd²



rolls
10/ 30 m
11/ 33 yd



ca. 35 µm



cold, heat, ultrasonic cut

Individual applications



card 1/1, effective: 02/2018

FR Film

Fields of application

.03 .04 .06 .07 .09



303

319

347

156

666

733

462

444

229

FR Film

Specifications

	130
	100 % PVC weldable, kiss-laminated
	ca. 130 cm ca. 51 inch
	B-s2, d0 DIN EN 13501-1
	ca. 225 g/m ² ca. 6.6 oz/yd ²
	rolls 30/ 60 m 33/ 67 yd
	ca. 170 µm
	cold cut

Individual applications



card 1/1, effective: 02/2018

Metallic Film

Fields of application

.04 .05 .06 .09



347

901

943

903

Metallic Film

Specifications



35



100 % PVC
weldable, kiss laminated



ca. 130 cm
ca. 51 inch



All colours are produced
with a flame retardant finish



ca. 240 g/m²
ca. 7.0 oz/yd²



rolls
30 m
33 yd



ca. 180 µm



cold cut

Individual applications



card 1/1, effective: 02/2018

Pearl Film

Fields of application

.04 .05 .06 .09



305

319

547

Pearl Film

Specifications

REF.

28



100 % PVC
weldable, kiss-laminated



ca. 130 cm
ca. 51 inch



All colours are produced
with a flame retardant finish



ca. 360 g/m²
ca. 10.6 oz/yd²



rolls
30/ 60 m
33/ 67 yd



ca. 280 µm



cold cut

Individual applications




card 1/1, effective: 02/2018

Opal

Fields of application

.03 .04 .05 .06 .09

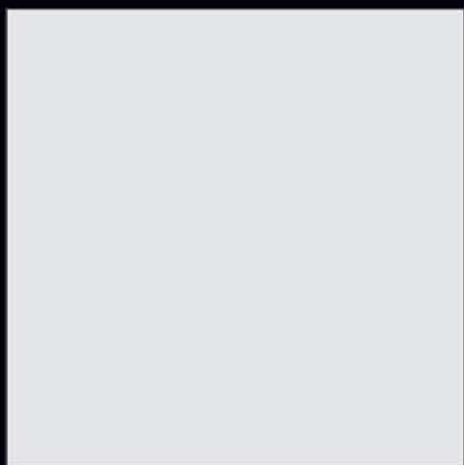

303

Opal

Specifications

REF.

58



100 % PVC
weldable



ca. 325 cm
ca. 128 inch



B1 DIN 4102



ca. 225 g/m²
ca. 6.6 oz/yd²



rolls
50/ 100 m
55/ 109 yd



ca. 180 µm



cold cut

Individual applications



card 1/1, effective: 02/2018

Lacquer Film

325 cm - 180 µm

Fields of application

.03 .04 .05 .06 .07 .09



303

307

501

507

511

571

347

Lacquer Film

325 cm - 180 µm

Specifications

	33
	100 % PVC kiss laminated, weldable
	ca. 325 cm ca. 128 inch
	B1 permanent DIN 4102 (refers to colour 303, additional colours available without certification)
	ca. 240 g/m ² ca. 7.1 oz/yd ²
	rolls 100 m 109 yd
	ca. 180 µm
	cold cut

Individual applications



card 1/1, effective: 02/2018

Metal Film

Fields of application

.04 .05 .06 .09



906 - mirror

333 - quartz

907 - gold

905 - copper

466 - ruby

184 - sapphire



digital print

906

Metal Film

Specifications

REF.	35
	surface: metallised polyester film carrier: soft PVC non-weldable
	ca. 130 cm ca. 51 inch
	All colours are produced with a flame retardant finish
	ca. 280 g/m ² ca. 8.2 oz/yd ²
	rolls 30/ 50 m 33/ 55 yd
	ca. 200 µm
	UV
	cold cut
Specs	content of vinyl chloride monomer: <1 ppm EN 12149 - B

Individual applications



card 1/1, effective: 02/2018

Diamond

Fields of application

.04 .05 .06 .07 .09



930



931



digital print

931

Diamond

Specifications

REF.	35
	surface: metallised polyester film carrier: soft PVC non-weldable
	ca. 130 cm ca. 51 inch
	All colours are produced with a flame retardant finish
	ca. 280 g/m ² ca. 8.2 oz/yd ²
	rolls 30/ 50 m 33/ 55 yd
	UV
	cold cut
Specs	content of vinyl chloride monomer: <1 ppm EN 12149 - B

Individual applications



card 1/1, effective: 02/2018

For further

information, please visit
www.pongs.com

PONGS Textil GmbH

Boschstraße 2
48703 Stadtlohn
Germany

Phone +49 2563 405-0
Fax +49 2563 405-155
info@pongs.de

PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltruff
Germany

Phone +49 36645 350-0
Fax +49 36645 350-190
technicaltextiles@pongs.de